

# Crosby® Hook Latch Kits



**SEE APPLICATION AND WARNING INFORMATION**

Para Español: [www.thecrosbygroup.com](http://www.thecrosbygroup.com) On Pages 129 - 130

## PL LATCH KITS




PL LATCH

## LATCH ORDERING INSTRUCTIONS

1. Specify PL, PL-N or PL-O latch kit stock number from charts below.
2. Specify capacity of hook to which latch will be assembled.
3. Specify hook material (carbon or alloy).

NOTE: The PL latch will not work on 319N, 320N or 322N hooks. The PL-N/O Latches, in the sizes available, will work on both the old and new style hooks.


## PL-N/O LATCH KITS

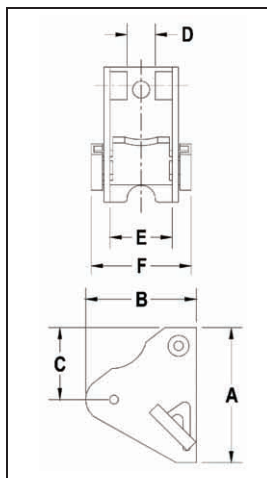

## PL Latch Kits

- Hot dip galvanized.
- Heavy duty latch with easy operating features.
- Flapper lever indicates locked or unlocked position.
- Assembly instructions included with each latch.
- For additional dimensional data on eye, shank or swivel hooks refer to pages 92 through 97 in this section.
- Meets the intent of OSHA Rule 1926.550 (g) (when secured with the bolt, nut and pin) for lifting personnel.

| Hook Size (t) |         | Hook ID Code | PL Latch Kit Stock No. | Weight Each (lbs.) | Dimensions (in.) |       |      |      |      |       |
|---------------|---------|--------------|------------------------|--------------------|------------------|-------|------|------|------|-------|
| Carbon        | Alloy   |              |                        |                    | A                | B     | C    | D    | E    | F     |
| 3             | 4-1/2   | I            | 1093711                | .54                | 2.57             | 2.34  | 1.94 | .56  | 1.13 | 2.00  |
| 5             | 7       | J            | 1093712                | .66                | 3.00             | 2.34  | 2.00 | .63  | 1.38 | 2.22  |
| 7-1/2         | 11      | K            | 1093713                | 1.00               | 3.63             | 2.77  | 2.38 | .63  | 1.63 | 2.38  |
| 10            | 15      | L            | 1093714                | 1.25               | 4.00             | 3.22  | 2.69 | .63  | 1.88 | 3.38  |
| 15            | 22      | N            | 1093715                | 2.96               | 5.31             | 4.00  | 2.91 | .84  | 2.38 | 3.44  |
| 20            | 30      | O            | 1093716                | 4.05               | 6.00             | 4.44  | 3.19 | 1.06 | 2.88 | 4.25  |
| 25            | 37      | P            | 1093717                | 8.63               | 7.00             | 6.63  | 4.06 | 2.24 | 4.50 | 6.12  |
| 30            | 45      | S            | 1093718                | 10.00              | 6.75             | 7.00  | 4.03 | 2.24 | 4.75 | 6.38  |
| 40            | 60      | T            | 1093719                | 14.30              | 8.00             | 7.66  | 4.38 | 3.46 | 5.50 | 7.25  |
| 50            | 75      | U            | 1093720                | 27.00              | 9.88             | 8.19  | 5.13 | 3.38 | 6.50 | 8.88  |
| -             | 100-150 | W - X        | 1093721                | 33.25              | 10.88            | 11.06 | 6.38 | 3.38 | 7.50 | 10.00 |
| -             | 200     | Y            | 1093723                | 45.00              | 11.88            | 11.19 | 6.38 | 3.38 | 8.75 | 11.25 |
| -             | 300     | Z            | 1093724                | 55.00              | 12.50            | 12.19 | 8.00 | 3.38 | 9.75 | 13.00 |

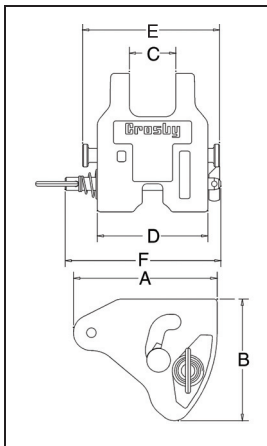

## PL-N/O Latch Kits

- Heavy duty latch with easy operating features.
- PL-N designed for Crosby 319N & 320N style hooks, PL-O designed for Crosby 319 & 320 old style hooks.
- Flapper lever indicates locked or unlocked position.
- Assembly instructions included with each latch.
- For additional dimensional data on eye, shank or swivel hooks refer to pages 92 through 97 in this section.
- Meets the intent of OSHA Rule 1926.550 (g) (when secured with the supplied toggle pin) for lifting personnel.

| Hook Size (t) |           | Hook ID Code | PL-N Stock No. | PL-O Stock No. | Weight Each (lbs.) | Dimensions (in.) |      |      |      |      |      |
|---------------|-----------|--------------|----------------|----------------|--------------------|------------------|------|------|------|------|------|
| Carbon        | Alloy     |              |                |                |                    | A                | B    | C    | D    | E    | F    |
| 3             | 4.5 / 5 * | I            | 1092000        | 1091900        | .8                 | 2.40             | 2.01 | .83  | 2.13 | 2.71 | 3.44 |
| 5             | 7         | J            | 1092001        | 1091901        | 1.3                | 2.94             | 2.50 | 1.00 | 2.52 | 3.19 | 3.83 |
| 7-1/2         | 11        | K            | 1092002        | 1091902        | 2.0                | 3.63             | 3.02 | 1.19 | 2.75 | 3.44 | 4.38 |
| 10            | 15        | L            | 1092003        | 1091903        | 2.8                | 4.00             | 3.39 | 1.34 | 3.19 | 4.00 | 4.50 |
| 15            | 22        | N            | 1092004        | 1091904        | 4.9                | 5.19             | 4.32 | 1.61 | 3.86 | 4.81 | 5.13 |

\* "N" style hooks are rated at 5 tonnes.